



R4-GUICRAT 4" REMODEL HOUSING HOUSING

Project		
Customer		Date
Address		

Features

Body

Remodel housing features low 5 5/8" profile for ceilings. Pre-wired .037" steel housing adjusts up to 1 3/4" ceiling thickness. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in remodel applications. IC Rated: Can have direct contact with insulation.

Air Flow Restriction

Airtight models are designed to restrict air flow from room into plenums in compliance to the WSEC-Washington State Energy Code (less than 2.0 CFM-Cubic feet per minute)

Mounting

Supplied with (4) high tension remodeling clips designed to secure housing to an existing sheet rock ceiling.

Location

Suitable for damp locations

Lighting Specifications

This housing is designed for IC rated ceilings. Accommodates one up to 10W LED GU-10 base bulb.

Junction Box

Pre-wired, galvanized steel J-Box (25 cubic inch) with (4) knock-outs. Strain clamps and ground wire included. Equipped with safety standard thermal protector rated for 90°C. Maximum 8 of No. 12 AWG through branch circuits conductor. G3 quick connects provided on J-Box.





Description

The Beach Lighting 4" remodel housing is suitable for most indoor and outdoor locations.

SPECIFICATION

Application	Housing
Approved Location	Damp
Beam Angle	N/A
CCT	N/A
Certification	cETLus
Class II	N/A
Color	Silver
CRI	N/A
Dimming	10%-100% (120V only)
Input	AC120V 50/60HZ
LM79	N/A
LM80	N/A
Lumens	N/A
Lumens per Watt	N/A
Power Factor	>0.98
Projected Life	N/A
Warranty	3 years
Wattage	up to 10W

Dimensions

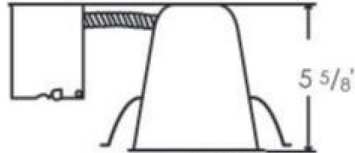

Cut Out: 4 1/4"



Due to our continued efforts to improve our products, product specifications are subject to change without notice.