
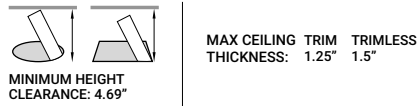


FEATURES

The Bravo collection features a sharp sleek design, no matter the type of fixture you choose within this collection. Whether you choose both Bravo ceiling mount luminaires and Bravo Recessed mount fixtures, there will be a harmonious integration throughout the room. Bravo Recessed mount fixtures are available in 3 body sizes and can be outfitted with 7 different modules that can be used for various applications and installations.

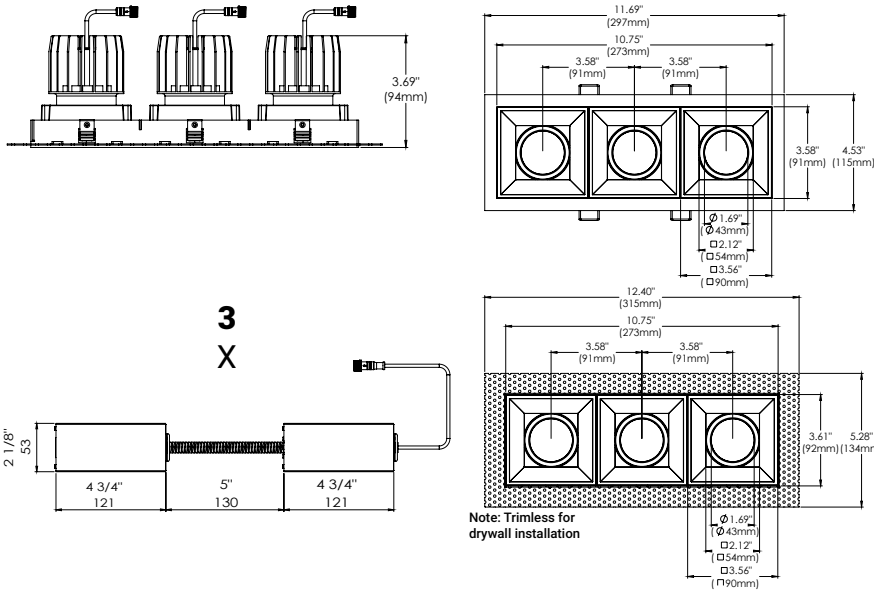

SPECIFICATIONS


| | |
|----------------------------|---|
| FIXTURE BODY | 18 gauge powder coated steel body. Aluminum powder coated trim or trimless mesh plate |
| INSTALLATION TYPE | Remodel/existing ceiling N/C plate, IC Box on page 2 |
| CUT HOLE | Trim: 11 1/4" x 4 1/8" Trimless: 11 1/4" x 4 1/8" |
| COLOR FINISH | Black/White/Custom |
| LIGHT MODULE | High output, high efficiency LED COB Lumen Maintenance: 70%@50,000 hrs |
| INPUT VOLTAGE | 120V - 277V |
| WATTAGE | 30W IC Rated, 45W Non-IC Rated |
| POWER SUPPLY | 3 x ERP 10W or 15W, Constant Current 250mA or 350mA power supply Minimum operating temperature: -30° Enclosed in a Junction box with 12" flexible cable to mate to module connector |
| CRI | 90+ |
| DIMMING | TRIAC/ELV/0-10V |
| DELIVERED LUMENS | 3 x 10W, 2430 Lumens & 3 x 15W, 3180 Lumens, Dim to Warm: 3 x 15W, 2355 Lumens |
| CCT OPTIONS | 2700K/3000K/3500K/4000K, DTM (Dim to warm) |
| REFLECTORS | (N) Narrow 15°/(M) Medium 24°/(W) Wide 38°/(F) Flood Wide 50° |
| DIFFUSERS | (CL) Clear/(LN) Linear Spread/(FR) Frosted (SP) Solite/(HC) Honeycomb Louvre |
| APPROVAL | Wet |
| ELECTRICAL APPROVAL | Compliant |
| WARRANTY | |

SPECIFICATION GUIDE

| BRAVO | RECESSED | 3-LIGHT | TRIM/ TRIMLESS | FINISH | LIGHT MODULE x 3 | WATTAGE | CCT | BEAM ANGLE | DIFFUSER | ADD-ONS** |
|-------|----------|---------|----------------|----------|---------------------|---------|-----------------|------------|---------------------|---|
| BVO | R | 3 | T TRIM | 01 BLACK | RFFF RECESSED FIXED | 10 10W | 27 | N 15° | CL CLEAR | EM EMERGENCY MICRO INVERTER |
| | | | TL TRIMLESS | 02 WHITE | | 15 15W | 30 | M 24° | LN LINEAR SPREAD | ** Sold Separate, see page 2 for details. |
| | | | | | | | 35 | W 38° | FR FROSTED | |
| | | | | | | | 40 | F 50° | SP SOLITE | |
| | | | | | | | DTW Dim To Warm | | HC HONEYCOMB LOUVRE | |

ORDERING GUIDE EXAMPLE:
 Bravo / Recessed Mount / 3-Light / Trim / White / Recessed Fixed / Recessed Fixed / Recessed Fixed / 10W / 3000K / 38° / Clear Diffuser
CODE: BVO-R-3-T-02-RFFF-10-30-W-CL
 For custom module configuration, email sales@eurofase.com

REFLECTOR OPTIONS

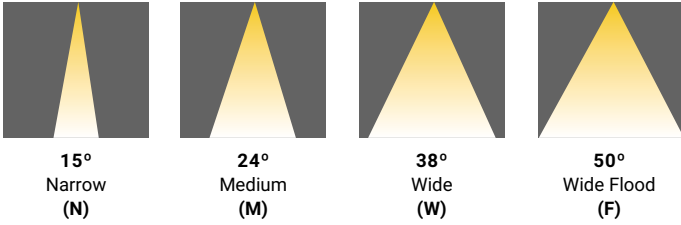


ADD-ONS (Sold Separate)



- Remote Mounted
- 150W Max 0-10V
- 25W Max Triac/elv.
- Can accommodate multiple fixtures
- Recommended to load to 80%
- 90 Min Service
- See Spc Sheet for more details

DIFFUSER OPTIONS

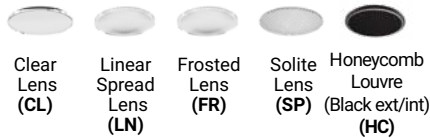


NEW CONSTRUCTION PLATES + IC BOXES




**NEW CONSTRUCTION PLATE
TRIM & TRIMLESS**
44362-010

CUT HOLE:
Trim & Trimless:
11 1/4" x 4 1/8"

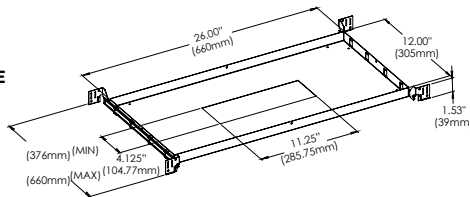

AT/IC BOX
46745-019


CUT HOLE:
Trim & Trimless:
11 1/4" x 4 1/8"


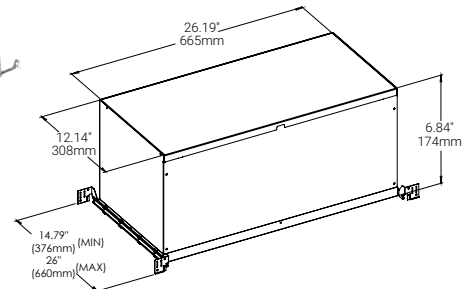


DRIVERS

- Compatible with TRIAC (forward-phase or leading-edge) ELV (reverse-phase or trailing edge) and 0-10V dimmers.
- ESSxxxW models: TRIAC and ELV dimming only at 120 Vac
- ESSxxxW models: ELV dimming only at 230 Vac
- 90° C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70° case hot spot temperature (some models have a higher lifetime)
- IP64-rated (IP66 for ESST) case with silicone-based potting
- Protections: Output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery.
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac), and EN55015 (CISPR 15) at 220, 230, and 240 Vac.
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Worldwide safety approvals



3 X

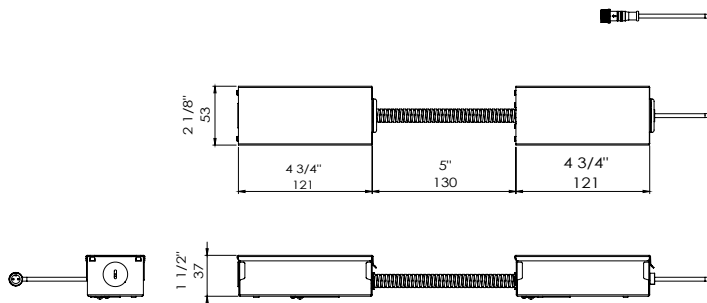

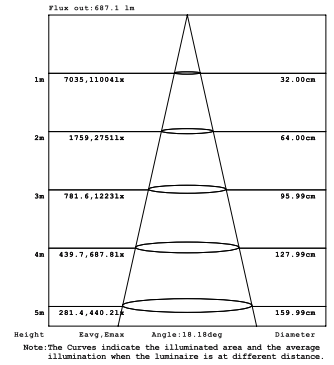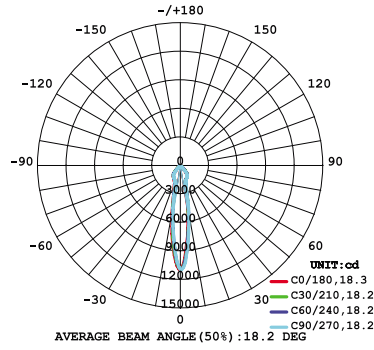



10W 1-LIGHT FIXED NARROW CLEAR

15W 1-LIGHT FIXED NARROW CLEAR

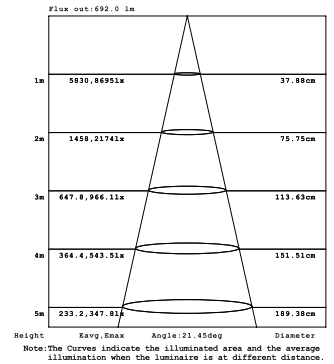
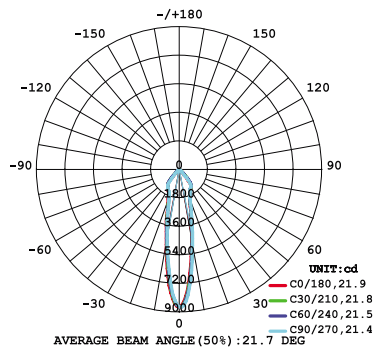


10W 1-LIGHT FIXED MEDIUM CLEAR



15W 1-LIGHT FIXED MEDIUM CLEAR

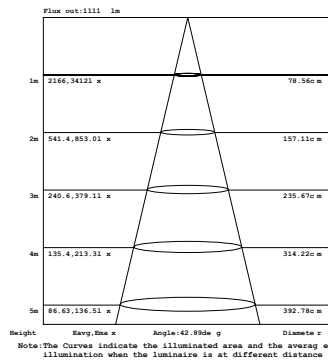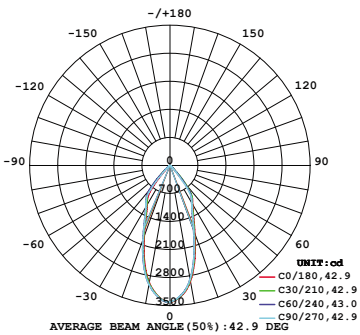

10W 1-LIGHT FIXED WIDE CLEAR

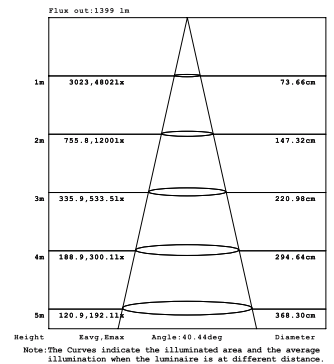
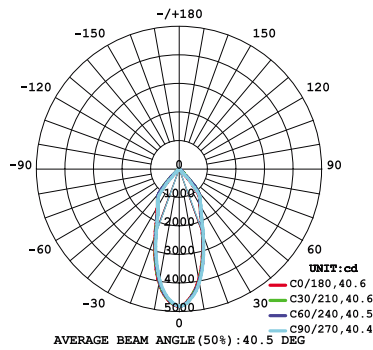


15W 1-LIGHT FIXED WIDE CLEAR

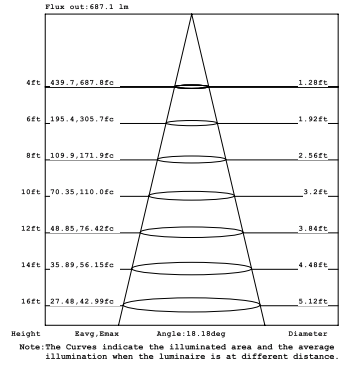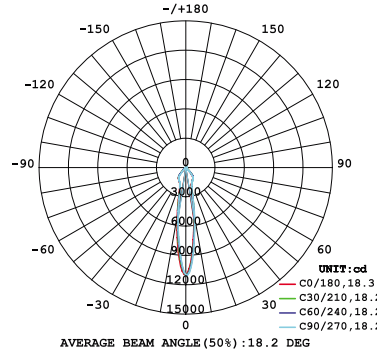



10W 1-LIGHT FIXED NARROW CLEAR

15W 1-LIGHT FIXED NARROW CLEAR

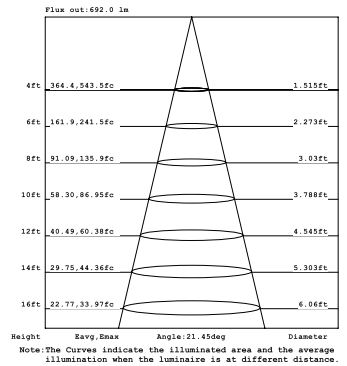
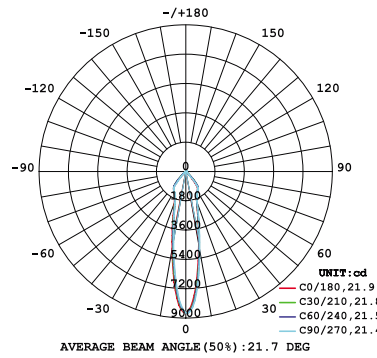


10W 1-LIGHT FIXED MEDIUM CLEAR

15W 1-LIGHT FIXED MEDIUM CLEAR

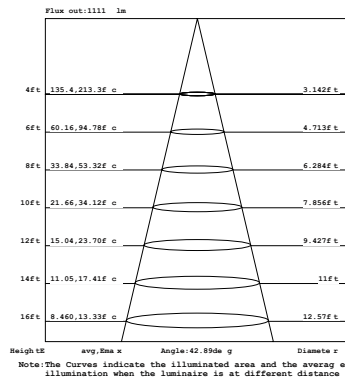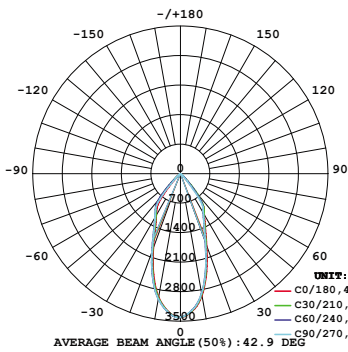

10W 1-LIGHT FIXED WIDE CLEAR

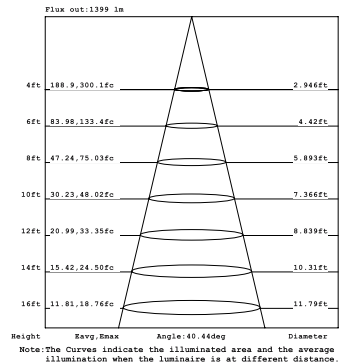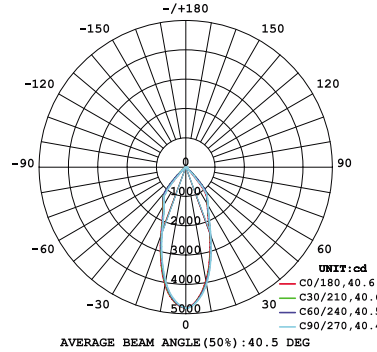

15W 1-LIGHT FIXED WIDE CLEAR