

_	
Pro	IDCT:
110	LCC.

Location:

Fixture Type:

Catalog Number:

## **AVAILABLE FINISHES:**





# Lanza

WS-52427

### PRODUCT DESCRIPTION

Streamlined and simple. An elegant bar of organic Spanish Alabaster is mounted on a rectangular plate. When lit, this slim sconce offers luxurious, softly diffused illumination.

## **FEATURES**

- ACLED driverless technology
- First class quality Spanish alabaster
- Natural alabaster with unique veining in each crafted piece
- Conversion plate included for 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

## **SPECIFICATIONS**

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed,ADA
Input	120 VAC,50/60Hz
Dimming	ELV: 100-5%,TRIAC: 100-5%
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K
CRI	90
Construction	Extruded aluminum body with alabaster shade


## REPLACEMENT PARTS

RPL-GLA-52427 - Alabaster

Model & Size	Color Temp	Finish	LED Watts	<b>LED Lumens</b>	<b>Delivered Lumens</b>
WS-52427 27"	3000K	AB Aged Brass	25.5W	2318	1281
	3000K	BK Black	25.5W	2318	1281

Example: WS-52427-BK

For custom requests please contact customs@modernforms.com

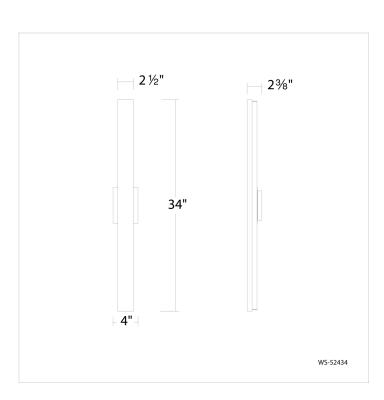

_	
Pro	ıect:
110	CCL.

Location:

Fixture Type:

Catalog Number:

### **AVAILABLE FINISHES:**



# Lanza

WS-52434

### PRODUCT DESCRIPTION

Streamlined and simple. An elegant bar of organic Spanish Alabaster is mounted on a rectangular plate. When lit, this slim sconce offers luxurious, softly diffused illumination.

## **FEATURES**

- ACLED driverless technology
- First class quality Spanish alabaster
- Natural alabaster with unique veining in each crafted piece
- Conversion plate included for 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

## **SPECIFICATIONS**

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed,ADA
Input	120 VAC,50/60Hz
Dimming	ELV: 100-5%,TRIAC: 100-5%
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K
CRI	90
Construction	Extruded aluminum body with alabaster shade

## REPLACEMENT PARTS

RPL-GLA-52434 - Alabaster

Model & Size	Color Temp	Finish	LED Watts	<b>LED Lumens</b>	<b>Delivered Lumens</b>
WS-52434 34"	3000K	AB Aged Brass	38.8W	3743	1718
	3000K	BK Black	38.8W	3743	1718

Example: WS-52434-BK

For custom requests please contact customs@modernforms.com