


EUROfase CONSTRUCT

Function TRIMMED RECESSED CHANNEL

PROJECT: _____

TYPE: _____ DATE: _____


NOTES: _____

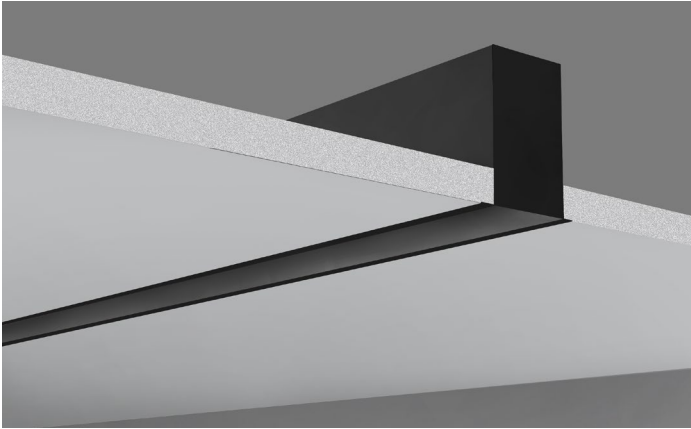


ORDERING GUIDE

ITEM#	FINISH	LENGTHS (End Cap Included)	
		Inches	mm
35771-01	Matte Black	36.87"	936 mm
35771-02	Matte White	36.87"	936 mm
35772-01	Matte Black	72.87"	1850 mm
35772-02	Matte White	72.87"	1850 mm
35773-01	Matte Black	96.87"	2460 mm
35773-02	Matte White	96.87"	2460 mm

LINE ART

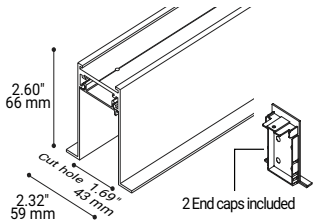

INNER CHANNEL COVER INCLUDED



PRODUCT DESCRIPTION

Aluminium channel with overlap trim designed for installation into existing drywall or T-bar ceiling

SPECIFICATIONS

CONSTRUCTION: Extruded aluminum with solid alloy copper bus bars

FINISH: Powder coat painted White or Black

MOUNTING: Supplied with twist and screw down brackets to lock channel into existing ceiling

Input: 24V DC



Electrical Approval: COMPLIANT

Approved Location: Dry / Indoor use

Field Cuttable: ***Field Cuttable**




36734-01 BK | 36734-02 WH
Trimmed Vertical Ceiling to wall
L-Connector

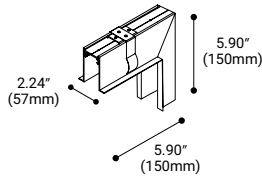

COMPATIBLE CONNECTOR AND FEEDS

CIRCUIT JOINT

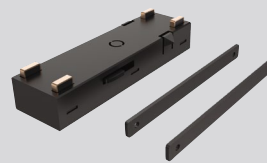

36362-01 BK
36362-02 WH

POWER JOINT



36364-01 BK
36364-02 WH

POWER END CAP



36369-01 BK
36369-02 WH

END CAP



36371-01 BK
36371-02 WH

LED REMOTE POWER SUPPLIES

96W HARDWARE TRIAC DIMMING



30264-014

96W HARDWARE 0-10V DIMMING



44912-017

























































EUROfase CONSTRUCT

Function LIGHT FIXTURE SELECTION

PROJECT: _____

TYPE: _____ DATE: _____

NOTES: _____

FIXTURE	ITEM CODE	CCT	FINISH		FIXTURE	ITEM CODE	CCT	FINISH	
LENS	 36372 -01	3000 K	BLACK		DUAL LENS	 35765 -01	3000 K	BLACK	
	 36372-35 -01	3500 K	BLACK			 35765-35 -01	3500 K	BLACK	
	 36372 -02	3000 K	WHITE			 35765 -02	3000 K	WHITE	
	 36372-35 -02	3500 K	WHITE			 35765-35 -02	3500 K	WHITE	
WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS	WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS
10 W	11.90"	3000K, 3500K	772	472	4.5 W	4.13"	3000K, 3500K	362	180
LENS	 36373 -01	3000 K	BLACK		WALL WASH	 36376 -01	3000 K	BLACK	
	 36373-35 -01	3500 K	BLACK			 36376-35 -01	3500 K	BLACK	
	 36373 -02	3000 K	WHITE			 36376 -02	3000 K	WHITE	
	 36373-35 -02	3500 K	WHITE			 36376-35 -02	3500 K	WHITE	
WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS	WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS
19 W	23.74"	3000K, 3500K	1824	1197	11 W	5.62"	3000K, 3500K	975	462
LENS	 36374 -01	3000 K	BLACK		MULTIPLE SPOT	 36379 -01	3000 K	BLACK	
	 36374-35 -01	3500 K	BLACK			 36379-35 -01	3500 K	BLACK	
	 36374 -02	3000 K	WHITE			 36379 -02	3000 K	WHITE	
	 36374-35 -02	3500 K	WHITE			 36379-35 -02	3500 K	WHITE	
WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS	WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS
27.5 W	35.55"	3000K, 3500K	2286	1428	11 W	5.67"	3000K, 3500K	975	463
MULTIPLE	 35757 -01	3000 K	BLACK		MINI SPOT	 35763 -01	3000 K	BLACK	
	 35757-35 -01	3500 K	BLACK			 35763-35 -01	3500 K	BLACK	
	 35757 -02	3000 K	WHITE			 35763 -02	3000 K	WHITE	
	 35757-35 -02	3500 K	WHITE			 35763-35 -02	3500 K	WHITE	
WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS	WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS
11 W	5.67"	3000K, 3500K	962	686	6.4 W	4.13"	3000K, 3500K	604	335
MULTIPLE	 35758 -01	3000 K	BLACK		SPOT	 35764 -01	3000 K	BLACK	
	 35758-35 -01	3500 K	BLACK			 35764-35 -01	3500 K	BLACK	
	 35758 -02	3000 K	WHITE			 35764 -02	3000 K	WHITE	
	 35758-35 -02	3500 K	WHITE			 35764-35 -02	3500 K	WHITE	
WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS	WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS
22 W	10.87"	3000K, 3500K	1925	1378	13.5 W	4.13"	3000K, 3500K	1207	659
MULTIPLE	 35759 -01	3000 K	BLACK		SUSPENDED	 35766 -01	3000 K	BLACK	
	 35759-35 -01	3500 K	BLACK			 35766-35 -01	3500 K	BLACK	
	 35759 -02	3000 K	WHITE			 35766 -02	3000 K	WHITE	
	 35759-35 -02	3500 K	WHITE			 35766-35 -02	3500 K	WHITE	
WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS	WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS
33 W	15.95"	3000K, 3500K	2888	2057	6.4 W	9.84"	3000K, 3500K	604	372
DUAL BAFFLE	 36377 -01	3000 K	BLACK		DUAL BAFFLE	 35765 -01	3000 K	BLACK	
	 36377-35 -01	3500 K	BLACK			 35765-35 -01	3500 K	BLACK	
	 36377 -02	3000 K	WHITE			 35765 -02	3000 K	WHITE	
	 36377-35 -02	3500 K	WHITE			 35765-35 -02	3500 K	WHITE	
WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS	WATTS	LENGTH	CCT	INT. LUMENS	DEL. LUMENS
4.5 W	4.15"	3000K, 3500K	398	301					